

©2003 PSI Woodworking Products - Philadelphia, PA 19115 v. 09/23

Turning the Bell:

Use #PKMONT -BU bushings. Insert the cap bushing over the mandrel shaft. Mount the blank and follow with the center bushing (narrow end in first). Use additional spacer bushings to close the gap to the threads. Lock the set-up in place on the mandrel.

Turn the wood down to an appropriate profile design. Sand and finish the wood.

Assemb ling the Bell:

- Insert the cap nut, recessed end first into the tube. Press into the lower end of the handle.
- Insert the end cap into the opposite end of the handle.
- Insert a washer over the clinger assembly threads. Slide through the bell's hole and screw tight into the handle.

End Cap


Turning the Candle:

Use #**PKVICBU** bushings. Slide one end bushing over the mandrel shaft narrow side first. Mount the blank against the wide end of the Bushing. Follow with a second end bushing with narrow end facing the blank. Use additional spacer bushings to close the gap to the threads. Lock the set up in place.

Turn the wood down to an appropriate profile design. Sand and finish the wood.

Assembling the Candle:

- Insert the cap nut, recessed end first into both ends of the turned barrel.
- Insert a washer over each screw. Affix the larger diameter of the barrel to the dish and the smaller diameter to the candle cup.
- Insert the protective disc inside the cup.

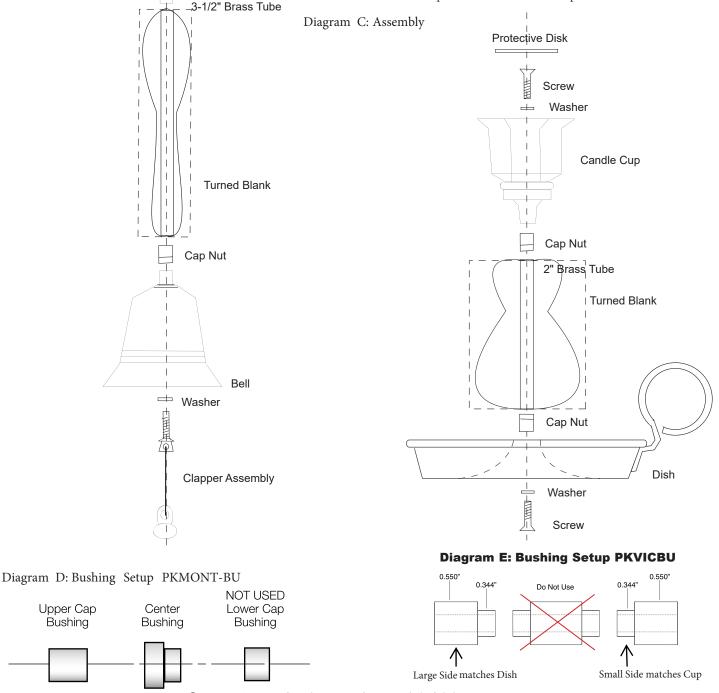

©2003 PSI Woodworking Products - Philadelphia, PA 19115 v. 09/23