

# Goose Call Kit

## Kit Features:

- Rigid ABS Plastic construction
- Designed by Game Call Professionals
- Factory tuned sound board
- Lanyard Optional

## Required Accessories:


- Blank required: 1-1/2" x 1-1/2" x 4" L
- 7mm Pen Mandrel
- Wooden Jam Bushing set: #PKGCALL2BU
- Drill Bits: #FB78 – 7/8" Spade Bit: 5/8" #PKSB58




## Preparing the Blank:

- Cut your blank to the desired length of this call. Mark the center of the square ends. Drill a 7/8" hole – 1-5/8" deep on one end (front opening). Continue with a 5/8" bit through the end.

### DIAGRAM B / TURNING THE

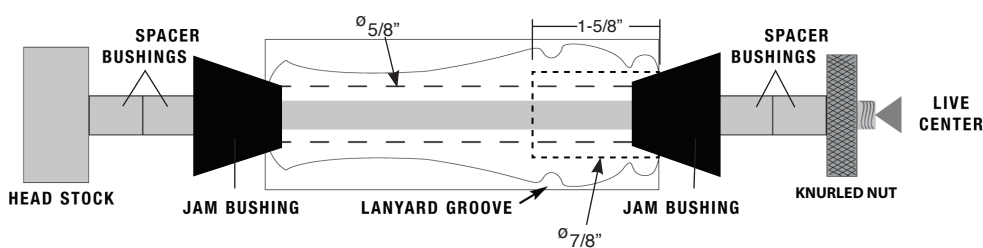

### DIAGRAM A / PARTS

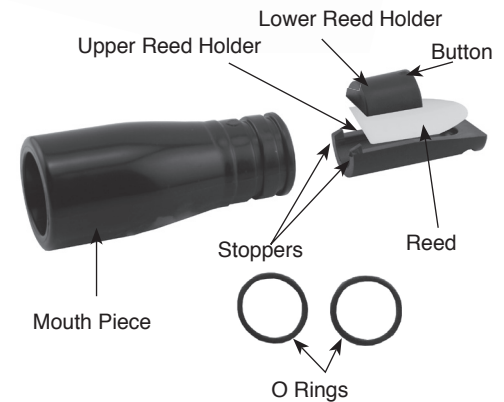

## Turning the Blank

- Mount spacer bushings and a jam bushing, wide end in first. Insert the blank with the narrow opening onto the mandrel; follow with the other bushing, narrow end in (see dia. "B"). Follow with spacer bushings.
- Use either a mandrel saver or a knurled nut to lock into place.
- Turn the blank to the profile of your choice.
- Carve a groove to attach the lanyard cord.
- Sand and finish the project. Use penetrating oil for wood or one-step™ plastic polish for acrylics.


## Assembly (see dia. A)

- Affix the reed to the lower reed holder, square end against the stoppers.
- Mount the upper reed holder with the button away from the stoppers over the reed.
- Insert this assembly into the smaller opening of the mouthpiece. Push up to the button.
- Affix the two 'O' rings into the grooves in the mouthpiece.
- Insert this assembly, reed end in first into the larger opening of the blank. Stop at the shoulder passed the second 'O' ring.
- The game call is ready to use.

## Tips & Techniques

- With this Canadian short-reed voice call, you can very easily produce loud clucks, moans and double clucks with excellent voice control and unparallel realism. Just cup your hands and inhale to stay busy in your favorite blind. If you test the call at home, be sure to close all doors and windows for uninvited geese.

### DIAGRAM C / JAM

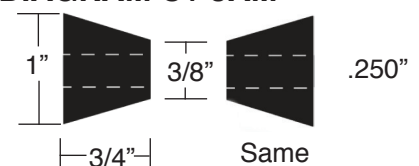

**PSI** Woodworking  
PRODUCTS