

Rollester Pen Kit

PKRB1000 • PKRB1010 • PKRB1015 • PKRB1020

Kit Features:


- Easy to turn with a straight tube
- Minimum parts - easy to assemble
- Uses standard Rollerball refill
- Available in multiple finishes
- Overall Length: 5-1/16"

Required Accessories:

- 7mm Pen Mandrel
- Drill Bit: 3/8" #PKEXEC-38
- Bushing set(2 pc) #PKCHPENBU
- Barrel Trimming set #PKTRIM38
- Live Tailstock Center
- 2 Part Epoxy Glue or Insta Cure (Cyanoacrylate) Glue
- Pen Blank: Minimum Size - 3/4" x 3-1/2" Long




DIAGRAM A / PARTS LAYOUT

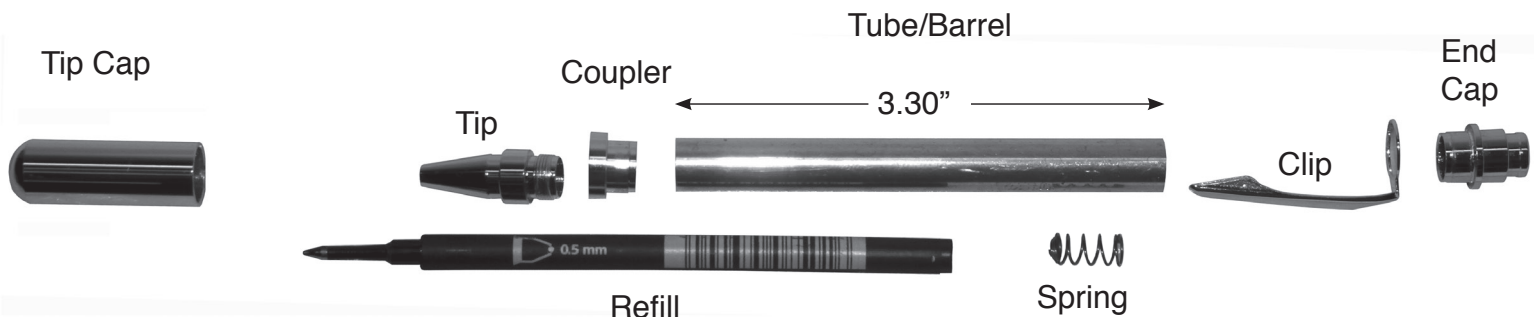

Preparing the Blank:

- Cut a blank to the length of the tube and add 1/16" for squaring off.
- Drill a 3/8" hole lengthwise through the blank.
- Spread glue over the tube, insert the blank with a twisting motion to spread the glue evenly inside.
- Center the tube lengthwise inside the blank.
- When the glue is dry, square the ends of the blank. Use a 3/8" barrel trimmer or a universal pen blank squaring jig with a power disc sander. Take the excess material down flush with the ends of the brass tube. (do not trim beyond the length of the tube since this may interfere with operation of the assembly).

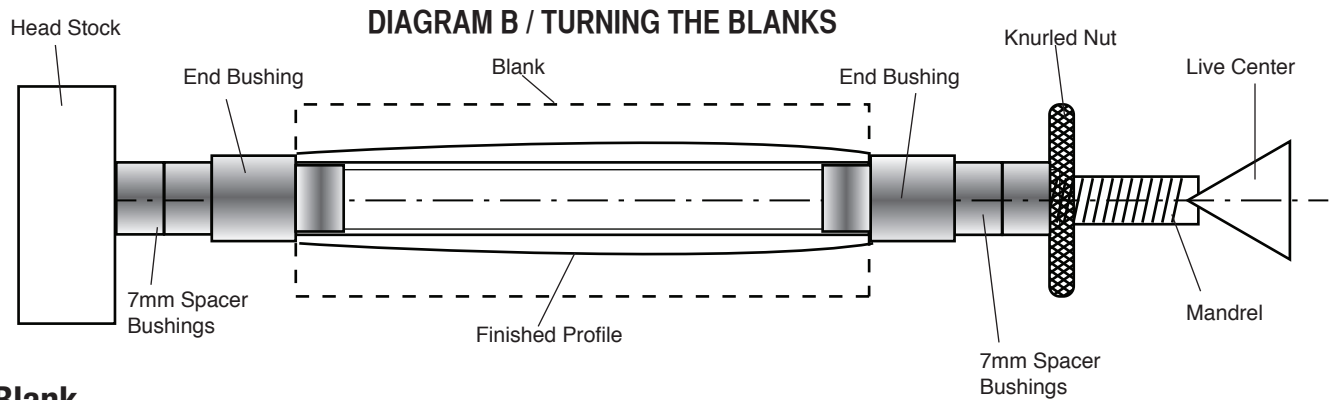

Turning the Blank

- Mount the bushings and blanks according to diagram B.
- Thread on the knurled nut and hand tighten to hold all components in place.
- Slide the tailstock up snugly against the mandrel shaft inserting the live center point into the mandrel dimple, lock in place.
- Hand tighten the quill adjustment to firm up the mandrel. (DO NOT overtighten, it could damage the mandrel.)
- Using sharp tools, turn the blank down close to the bushing diameter. Turn the barrel (straight or to a profile of your choice)
- Sand the blank down to be flush with the bushings gradually increasing the sandpaper grits.
- Finish the barrel with your choice of polish. Allow sufficient time for the polish to cure. Refer to polish instructions.

Assembly

- Layout parts according to diagram A , pull out tip and coupler from inside of tip cap.
- Press the coupler into either end of the barrel.
- Feed the cap through the clip, press into the opposite end of the barrel.
- Drop the spring into the opening in the coupler.
- Pull the refill cover off the refill, slide the refill into the barrel pushing the spring to the end.
- Screw the tip over the refill into the coupler.
- Place the tip cover / retainer assembly over the tip, pushing in until a click is heard.
- When not in use, it is recommended to keep the cover on.

Diagram C / Bushings #PKCHPENBU

