



Tempest

Owner's Manual


TEMP142 / TEMP142CX (2HP) &
TEMP143 / TEMP143CC (3HP)

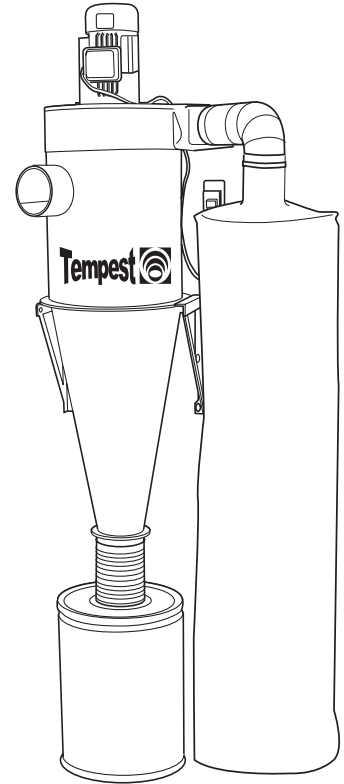

TEMP142/143

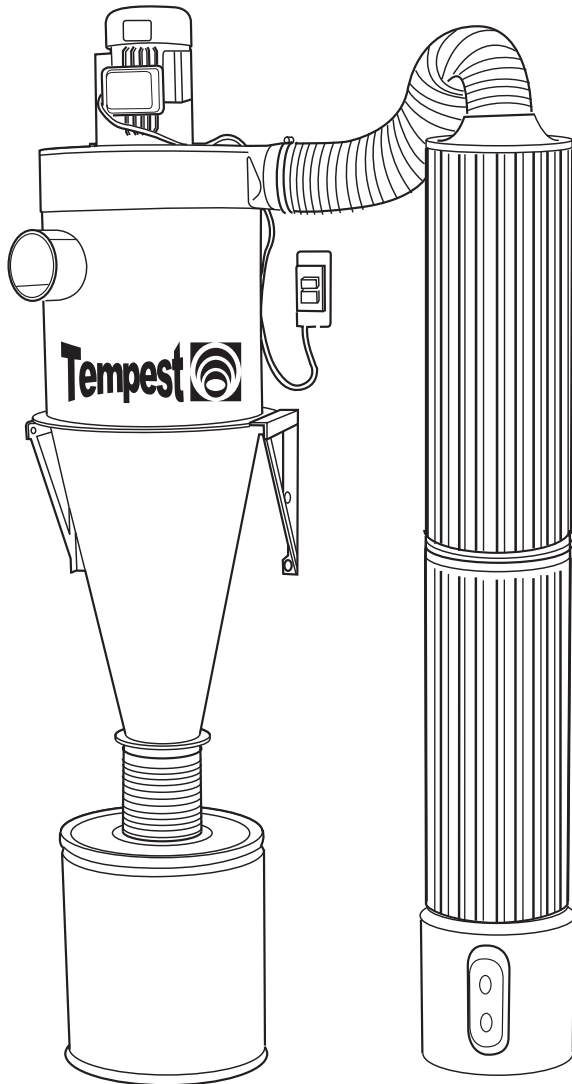

TEMP143CC

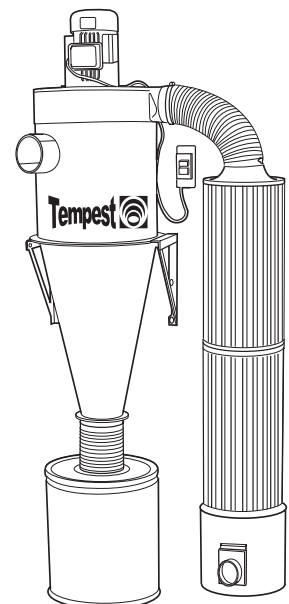

TEMP142CX

PSI Woodworking Products

Thank you for purchasing one of PSI's growing family of woodworking products. Our Tempest cyclone systems are engineered and manufactured to the highest standards of quality. You will find the Tempest to be a remarkable dust collection machine.

Warranty

This product is warranted against defects in material and workmanship for a period of five years on the motor and all other components. This warranty applies to the original purchaser of the product and is limited to the repair or replacement of the product or its parts at the discretion of PSI Woodworking Products. Excluded are parts which have been misused, abused, altered, or consumed by normal operation of the machine. Also excluded are direct or consequential damages to persons, properties, or materials. Your invoice serves as proof of purchase and must be referenced to authorize warranty repairs. Call your dealer for proper authorization. Owner is responsible for returning warranty service parts at their expense. Defective parts will be repaired or replaced at the manufacturer's discretion.

Safety

- Do not use this system near flammable or combustible liquids or gases including gasoline or other fuels, cleaners, oil-based paints, natural gas or explosive dusts like coal dust, magnesium, grain dust, or gun powder.
- Do not vacuum anything that is burning or smoking such as cigarettes or hot ashes.
- Do not vacuum toxic materials or use near hazardous materials.
- Do not use outdoors or on wet surfaces.
- Do not operate with a full waste container.
- To avoid collapse, use 26 gauge steel or thicker for ductwork.
- Install on a stable level surface. Because the Tempest is top-heavy, be certain to secure the motor/blower unit to a wall. If assembled on a stand, make sure the base and supporting structure is stable. Secure the upper portion of the unit with safety wire.
- Do not use without filter bag or canisters attached.
- Turn off controls before unplugging. Do not pull cord to unplug, grasp plug and remove from receptacle.
- Do not operate with the motor/blower off of the cyclone- this could cause severe overheating and/or motor burnout.
- Do not use with damaged cord, plug, or other parts. Only install to a properly grounded outlet.
- Do not wear loose clothing in the area of any inlets because high suction could pull and stretch garments into blower
- If your ductwork consists of only plastic hose or pipe, ground hose or pipe by wrapping bare copper wire around the exterior surface and ground the wire at either end.
- Keep hands free from spinning impeller.
- The Tempest is only warranted and guaranteed for the collection of wood dust although it may be quite suitable for other applications.

Features

- Powerful motor blower unit has a proven flawless performance record
- Able to capture over 99% of all dust and debris before it passes through the motor blower
- 5-micron filter bag or 1/2- micron filter cartridge for fine filtration
- Includes wall support brackets
- Simple operation and easy cleaning of debris from the collection canister
- With nearly clean filters, system consistently runs at peak performance
- 14" aluminum impeller provides superior performance
- "Neutral vane" intake maximizes airflow.
- Longer cyclone funnel improves separation efficiency
- Includes convenient heavy-duty on/off switch on power cord
- Designed to fit under 8 ft. ceiling (with 21" fiber drum).
- 72" x 24" 5-micron filter bag

Contents


• Warranty	2
• Safety	2
• Features	2
• Specifications	2
• Components	3
• Assembling Cyclone	4
• Assembling Filters.....	5
• Filter Maintenance.....	5
• Installation and Operation.....	6
• Accessories.....	7

SPECIFICATIONS	Tempest 14" 2HP	Tempest 14" 3HP
Max CFM Free Air	1900 CFM	2200 CFM
VAC, Max Amps (single phase)	220V, 10 amp	220V, 14 amp
HP	2 HP	3 HP
Max Static Pressure	10.6"	11.4"
Impeller Diameter	14" Aluminum	14" Aluminum
Sound	75-90 Db	78-93 Db
Gauge of Cyclone Body	17 ga	17 ga
Weight (motor & cyclone)	146 lbs	165 lbs

Components


- 1) Motor blower unit DC14MB2HP for TEMP142 / TEMP142CX
DC14MB3HP for TEMP143 / TEMP 143CC
- 2) Cyclone assembly consisting of:
 - top cylinder
 - center flange with 9 sets of nuts and bolts
 - bottom cone
 - gasket
 - two screw-mount wall brackets
- 3) Drum kit consisting of:
 - 2 ea. 7" hose clamps
 - 1 ft. of 7" diameter hose
 - 7" diameter flange
- 4) Outflow assembly consisting of:
 - 2 each flexible 6" diameter elbows (TEMP142, TEMP143)
 - one 6" hose clamp (TEMP142, TEMP143)
 - 2 each 6" hose clamps (TEMP142CX, TEMP143CC)
 - 4' clear flexible hose (TEMP142CX, TEMP143CC)
- 5) Filter Packs:

fig. 1 - Tempest Dimensions

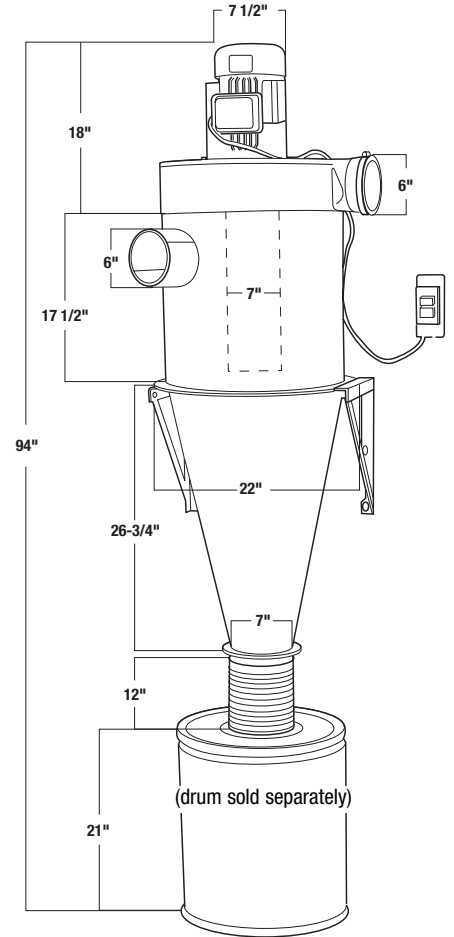

Bag Style	Cartridge Style	Cartridge Style
TEMP142/143 (bag filters)	TEMP142CX	TEMP143CC
• 1ea. 5 micron bag (BCYC6)	• 2ea. 26" filter (CYFA)	• 2ea. 36" filter (CYF36)
• 2ea. adjustable elbows (R-90E06)	• 1ea. fiber cleanout can (CYFILCAN3)	• 1ea. metal cleanout can (CYFILCAN2)
• 2ea. 6" hose clamp (DBC6)	• 2ea. 6" hose clamp (DBC6)	• 2ea. 6" hose clamp (DBC6)
	• 1ea. bell mouth (N-BELL06)	• 1ea. bell mouth (N-BELL06)
	• 4ft. clear plastic hose (CYH142CC)	• 4ft. clear plastic hose (CYH142CC)

fig. 2 - Filter Dimensions

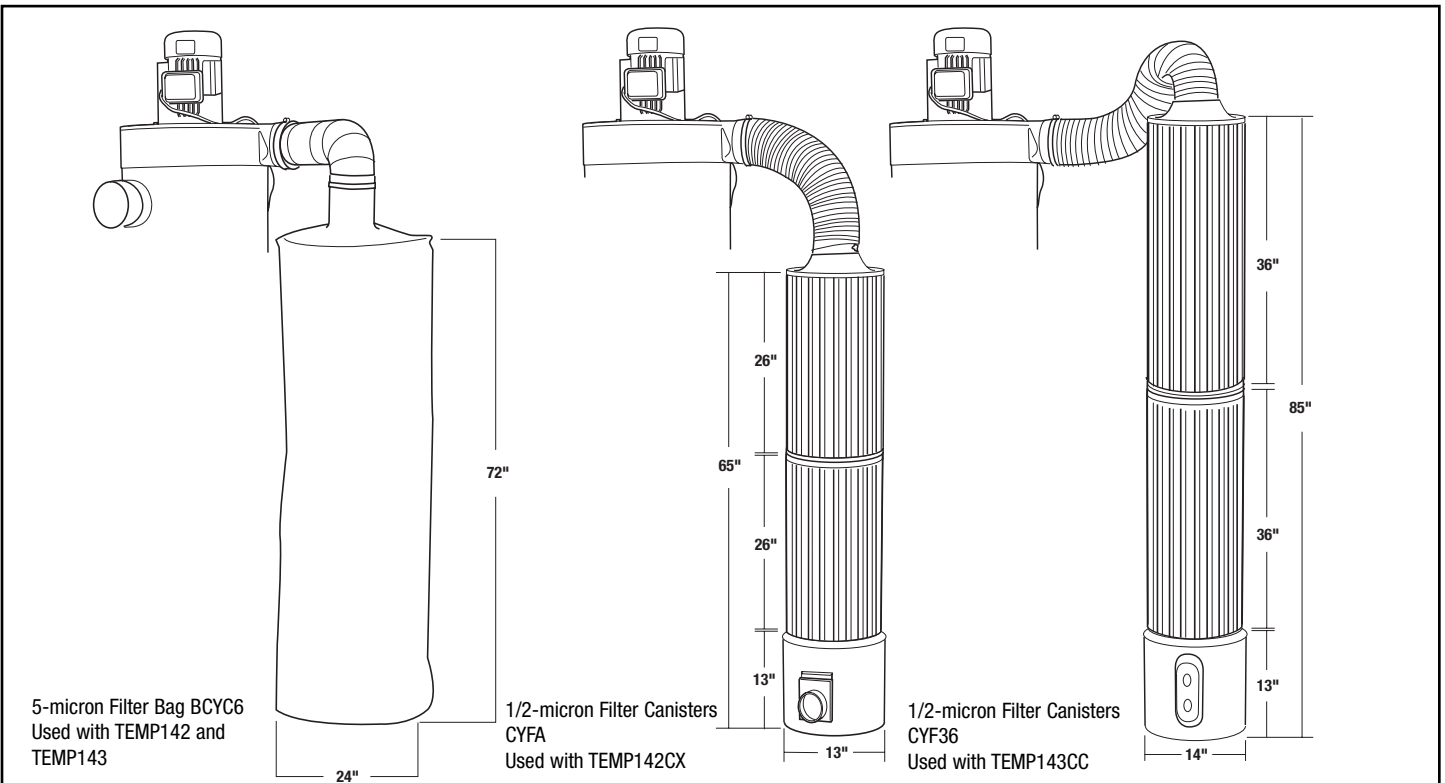

Assembly


To make the assembly easier, it is suggested that the entire unit be assembled, on the floor, to a sheet of 3/4" plywood and carefully lifted into place.

- 1) Align the vortex pipe (D) with the screw holes at the top of the upper cyclone body (B) and secure with three M8 x 16 bolts, washers, nuts, and a bead of silicone caulk. Make sure the bolts are first positioned from the top of the upward cyclone body downward. The washers and nuts will be protruding below the three holes of the vortex pipe (D), TIGHTEN. Failure to correctly orient these fasteners may result in damages to the motor blower.
- 2) Carefully invert the motor blower assembly (A) onto a smooth soft surface (e.g. carpet) and align (B) so that all (8) holes are matched. Adjust the relationship of the inlet and exhaust ports of the cyclone to match your floor plan. Firmly secure A to B with a bead of caulk and 8 pan-head flange bolts (M6 x 12). Carefully, lay the assembly aside at this time.
- 3) Locate the neutral vane cylinder (C) and slip it into the suction intake of the upper cyclone body (B). The neutral vane cylinder should extend 5" out of the intake port. Secure it with silicon caulk or sheet metal screws (not provided).
- 4) Locate the adhesive-backed foam strip (G) 64" x 3/8" x 1/16" and carefully attach it to the large flange at the top of the cyclone cone (E). This will assure an airtight seal between the body (B) and the cone (E) sections. Put the cone section in place over the inverted body aligning the 10 holes for the ten M8 x 30 hex head bolts, nuts, and washers. Insert the ten bolts and washers through the bottom of the box flange and secure with the appropriate nuts. (Use the four longer bolts through the holes which will align with the mounting brackets (F).) Do not tighten at this time. The unit is now ready to be fastened to the wall.
- 5) Determine an appropriate location for your cyclone. Setting the Tempest upright in its final position will require the assistance of another person. The two mounting brackets (F) should be mounted as shown— 19-7/8" apart on the centerline of the bolt slots. Take into consideration the height of your ceiling and the height of your barrel and determine the proper height to mount the wall brackets. Depending on the construction of the selected wall, use six best grade 1/4" lag bolts or concrete fasteners. Firmly attach the brackets to the wall and test for strength.
- 6) Note: Of the 10 bolts holding the body (B) to the cone (E), the four longer ones should be removed at this time. These four bolts, 2 each, located on either side of the unit will be used to connect the unit to its wall brackets. Lift the entire system into position and fasten it to the wall brackets using the four bolts (M8 x 30) taken from the upper flange. Tighten all 10 bolts and nuts.
- 7) Screw the wall-mounted on/off switch to an appropriate location. Keep in mind small children and your own convenience. Be sure to connect to a 220V power service.
- 8) Using the 7" waste can flange (H) as a template cut a 7" hole in the lid of your waste can and drill 8 each 3/8" holes for 3/8" hex bolts (not provided). Bolt and seal the flange to the top of the can with a quality silicone sealant (**#CYSCAULK**). Let this cure for 24 hours before testing. Connect the waste can lid to the bottom cyclone flange with the included 12" x 7" clear flex hose (I) and hose clamps (L).
- 9) Secure the motor to the wall with the supplied support bracket (K). Carefully remove the two top bolts holding the motor to its support

- and attach the bracket to the support plate on the motor using these same two bolts. The wall end of the bracket should be mounted to the back wall with the same type of fasteners used for the wall brackets (F).
- 10) Install filter bag or cartridges as described on page 5.
- 11) Finally, with the unit operating, inspect all seams and connections for pin-hole leaks. If any appear, they should be filled with a premium silicone caulk and given enough time to fully cure before re-testing. Failure to seal properly will result in excess dust in your final stage filter bag or cartridges.

Congratulations, you are ready to use your new PSI Tempest!

fig. 3 - Tempest Components

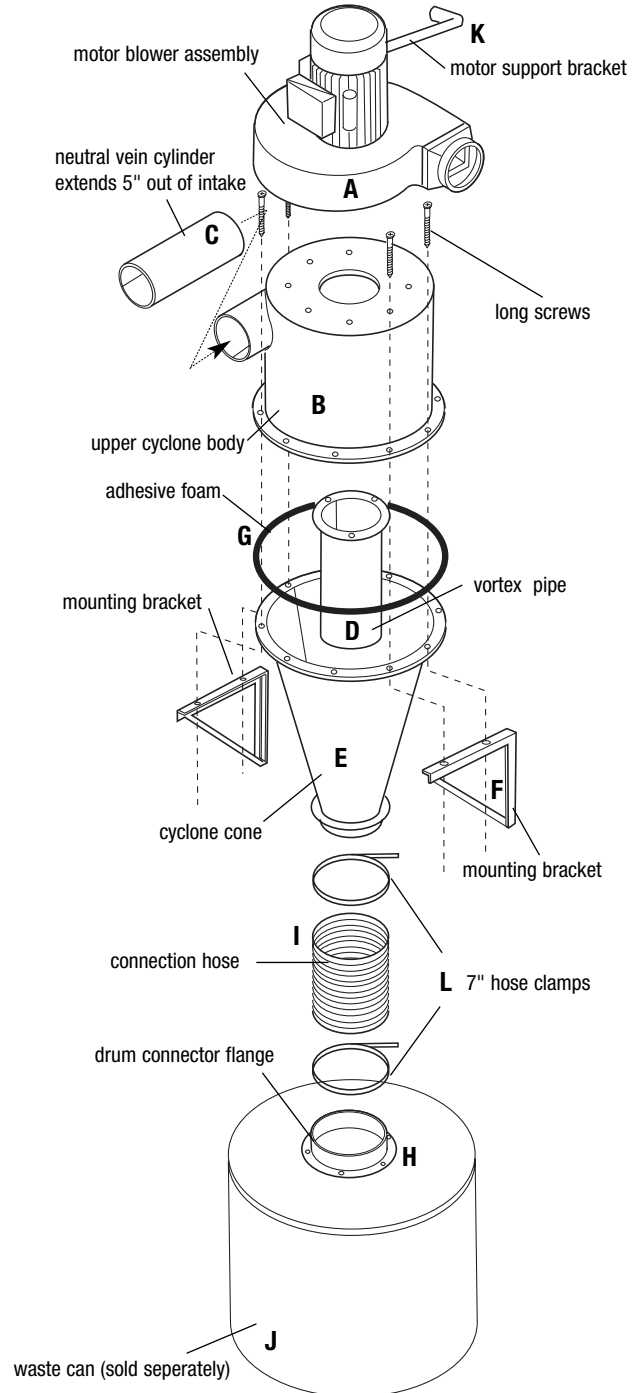

Assembling 5-micron Collection Bags

Models TEMP142 and TEMP143 with standard 5-micron felt bag (BCYC6)

This high filtration bag collects any super fine particles that may pass through the cyclone unit. It has a zipper on the bottom for easy cleaning access. It may hang vertically from the motor blower or positioned anywhere else in the shop, even along the ceiling. Remember, virtually no dust will collect in this bag. It is primarily used to prevent super-fine dust from re-entering the air. Two 6" diameter metal duct elbows connect to the bag from the motor blower. Used on models: TEMP142 and TEMP143

Connecting the 5-Micron bag to the motor blower exhaust port.

Fit together two 6-inch adjustable sheet metal elbows (included). Secure the two together with pop rivets, small sheet metal screws, adhesive caulk, or duct tape. Insert corrugated end of elbow into the exhaust port of the motor blower and seal. Now, connect the 72-inch bag to the adjustable elbow with the 6-inch hose clamp provided.


Bag Positioning

Hang the 5-micron bag vertically, with the zipper on the floor. However, if needed the bag can be suspended horizontally using two hangers (not provided) attached at either end of the bag at the seams.

Bag Maintenance

Never wash the bag. Water will cause the material to lose its effectiveness. After using the bag for approximately 6 hours, whack the outside of the bag with the equivalent of a wooden yard stick. This will free up most of the fine dust attached to the inside walls. Periodically unzip the bottom and clean out.

fig. 4 - Bag Filter Diagram

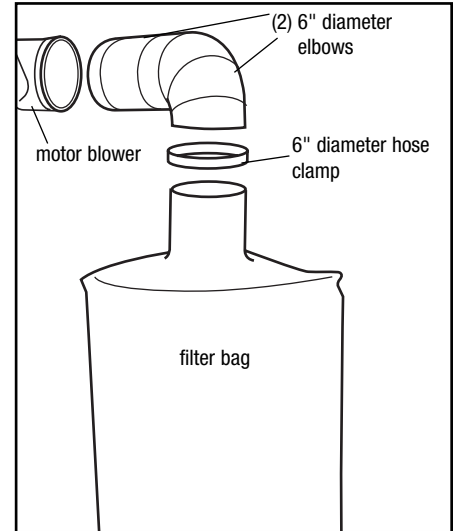

Assembling 1/2-micron Canister Filters

Models TEMP142CX and TEMP143CC with 1/2-micron cartridges

Refer to the chart below to determine the configuration of your cyclone system.

Model	Cartridges	Hose	Cleanout Can
#TEMP142CX	2 ea. #CYFA 26" length x 13" dia.	#N-FH063	#CYFILCAN3 (fiber)
#TEMP143CC	2 ea. #CYF36 36" length x 14" dia.	#N-FH063	#CYFILCAN2 (steel)

Assembly of the 1/2-micron Cartridges and Cleanout Can

Preparation of Cartridges

Apply a large amount of silicone adhesive to the top of the lower cartridge (A). Place the second cartridge on top of the adhesive and firmly press down, making an airtight fit. This adhesive needs a full 24 hours to cure. While curing, apply adhesive around the cartridge neck connector (B).

Preparation of Cleanout Cans


For CYFILCAN3 (C), cut a 8" hole in the center of the can's lid. Next, use the blast gate to scribe a 4" cutout hole on the side of the can. Cut the hole and use a generous amount of caulk to seal the gate into the hole. Set the cartridge filters on top of the cleanout can. Use a silicone adhesive to seal the bottom of the lower filter to the top of the cleanout can.

Cartridge and Cleanout Can Maintenance

Keep filters dry at all times. Use compressed air or a shop vacuum to clean the cartridges. Set the compressor to 40 psi and move the air source up and down the outside of the cartridge, aiming towards the center. Take time to clean each pleat of the filter from top to bottom. Very fine dust will fall into the cleanout can and accumulate.

Periodically, use your shop vacuum to remove dust from the cleanout can. For best results, insert the suction end of the shop vac into the can via the mounted blast gate or access door and turn it on. Blow the filters clean with the vacuum's exhaust while pulling the dust through the cleanout port on the can. This will prevent fine dust from travelling back through the system. The can should be checked about every six months.



fig. 5 - Canister Filter Assembly

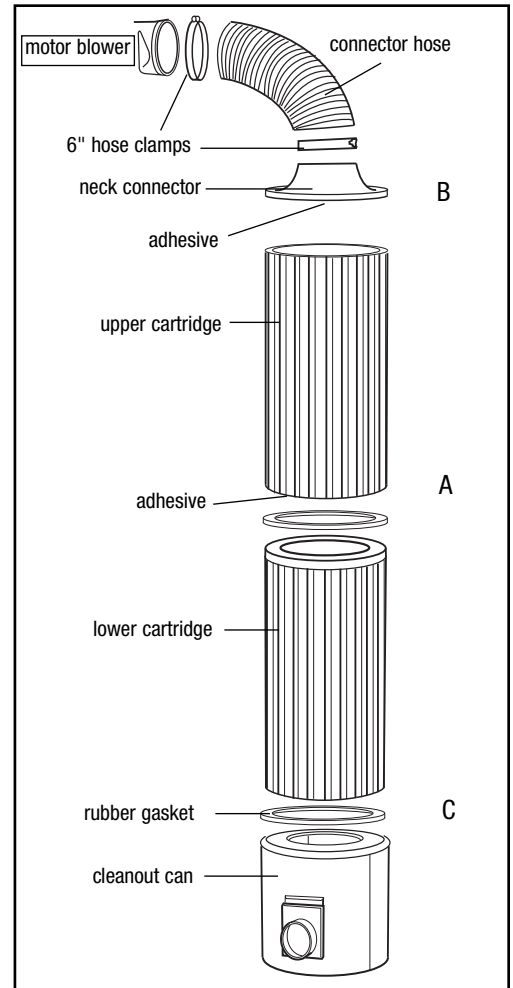

Tempest Cyclone Operation and Installation Suggestions

- 1) Try to maintain the largest possible diameter of ductwork throughout the shop leading up to connections with your machines. The air inlet to the Tempest cyclone is six inches in diameter. Therefore, use 6" ductwork throughout the shop if possible. Because 30ga. galvanized HVAC may collapse under pressure from the vacuum, we suggest using strong (26ga. or heavier) spiral metal pipe as distributed by PSI.
- 2) Use "Y" or lateral type bleed offs from the main (as opposed to a "T"). This will help to maintain more efficient airflow. The diagram below indicates laterals that feed to 6" extension lines and then to 4" hookup drops for machine connections.
- 3) Use blast gates at every connection between machinery and ductwork in order to close branches when not in use.
- 4) Since it is conductive, no grounding is necessary when using galvanized metal ductwork. Check continuity to be sure the entire system is grounded.
- 5) To maximize airflow, avoid sharp 90° turns and excessive reductions in hose diameter.
- 6) Poor air flow or excessive dust in the filter bag may be a result of a poorly sealed system. The most common leak is at the drum lid. Check the lid and all other connections at the cyclone to ensure the best performance.

fig. 6 - Ductwork Layout Diagram

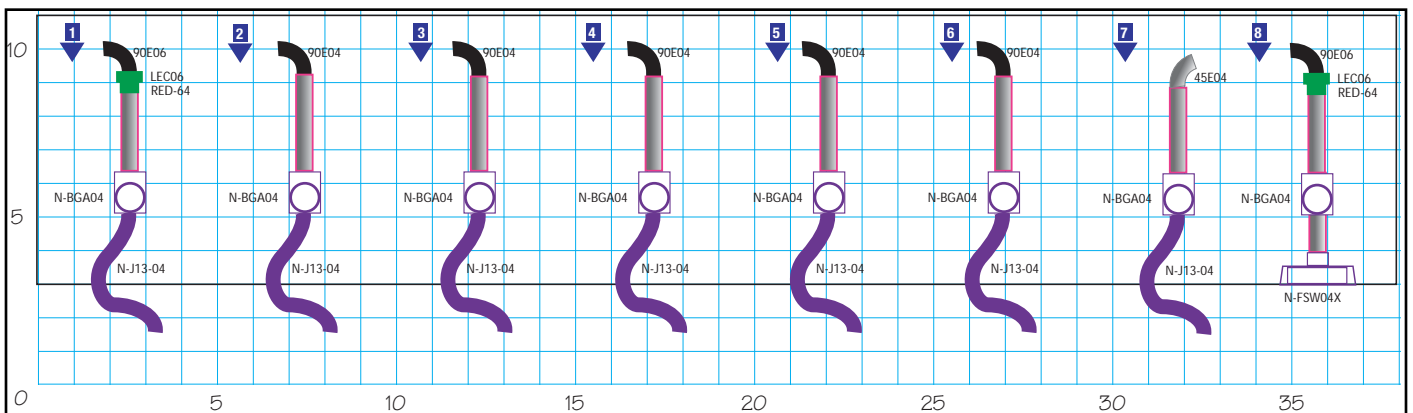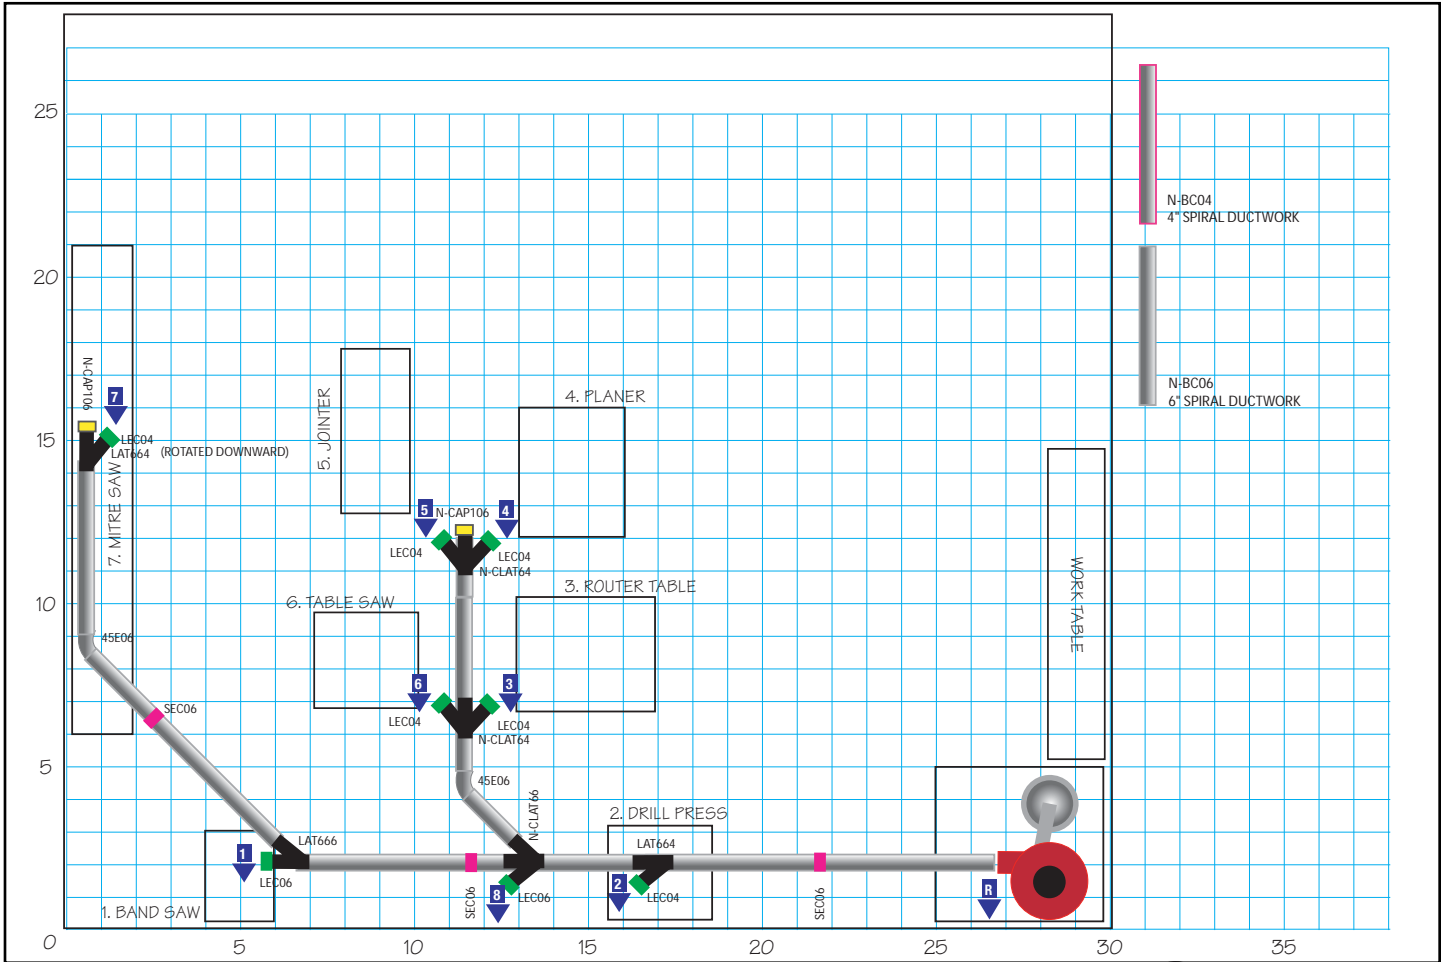

1. 26ga Snaplock Pipe

Snaplock metal pipe is economical, smooth, and practical. It is delivered open and flat—snap it together and lock it along the length of the pipe's seam to make your pipe. It is an easy cut to length with shears. Available in 5' lengths only.

2. Heavy Duty Spiral Pipe

(24 gauge) The inside of the pipe is very smooth while the continuous outside seam provides superior support and strength. Large ends adapts to small end coupling and fittings. Available in 5' lengths only.

3. Long Ranger Remote Dust Collector Switch - LR220-3

Save yourself the inconvenience of walking over to turn on your cyclone when you find you're in the middle of a critical project. Simply press the transmitter on/off button to easily switch your cyclone on or off.

4. Long Ranger MultiGate Switch System - LRMSET220

Turn on your cyclone when you open your blast gate.
Never forget to turn your dust collector on or off. Make it automatic when your cyclone is wired to the MultiGate™ switch system.

5. Ecogate™ Automatic Dust Collector and Blast Gate Switch - ECOGATE4

The ECOGATE™ system opens your blast gate and turns on your cyclone when you turn on your woodworking machine, then shuts the gate and turns off the cyclone when the machine is switched off. For 1HP @ 110V or 1-1/2HP and 2HP @ 220V collectors.

6. Cyclone Muffler - TEMUFF-6

Reduces cyclone sound by 50% (10db) without effecting machine performance. Attaches between cyclone and filter. Requires hose to connect. Length of muffler with flanges is 23-3/4" and has a 6" diameter connection.

7. Dust Level Sensor - BINSENSOR

Sounds an alarm when your cyclone's bin is full
No more guessing about the dust levels in your cyclone's collection drum. A rotating paddle mounts through the lid of your container and activates the sensor when the paddle is stopped by a high sawdust level. Includes a 110V power cord and a relay connection that can activate an external device such as a visible light bulb.

8. Dual Drum Kit - CYDDK

Double the amount of dust you can collect before you have to empty your drums. **Includes:** 7" wye and cyclone connector, a 7" connection hose, two flanges, & band clamps. Adds 12" height to cyclone.

9. 26 gal. Fiber Drum - CYDRUM26

A great low profile high capacity container. Lid removes easily with clamp release.

10. Table Saw Dust Collection Guard - TSGUARD


This Guard is the ideal solution for table saw safety and dust control. When connected to a dust collection system, the PSI Dust Collection Guard captures the dust thrown up by your table saw blade. The Guard can be used on any table saw with an extension table. It is very easy to install and easily swings out of the way. A unique counter-balance allows

11. Dust Grabber Downdraft Table - DGTABLE2

The Dust-Grabber sanding table captures the dust before it enters the air you breathe.

- Non-slip perforated, non-marring surface.
- Strong, laminated hard board construction.

Accessories

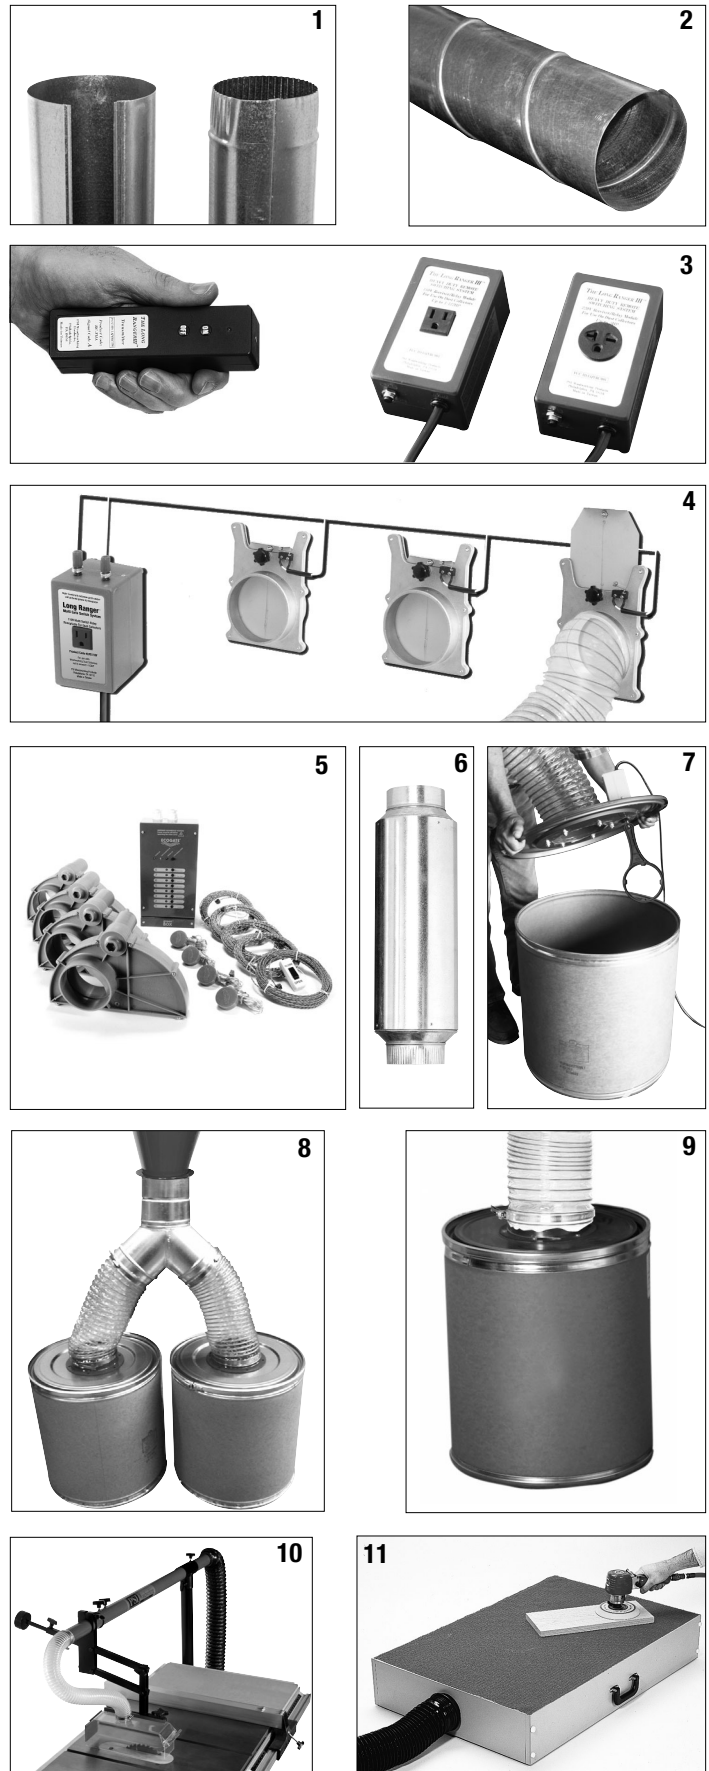

Notes

