

Squirrel Call Kit

Kit Features:

- Rigid rubber construction
- Designed by Game Call Professionals
- Factory tuned sound board
- Lanyard Attachment (optional)

Required Accessories:

- Blank required: 1-1/2" x 1-1/2" x 2-1/2" to 4" L
- 7mm Pen Mandrel
- Wooden Jam Bushing set: #PKGCALL2BU
- Drill Bit: #PKDB12 – 1/2" Dia.

Preparing the Blank:

- Cut a blank to the size required.
- Mark the center of the square ends.
- Drill a 1/2" hole, centered through the blank.


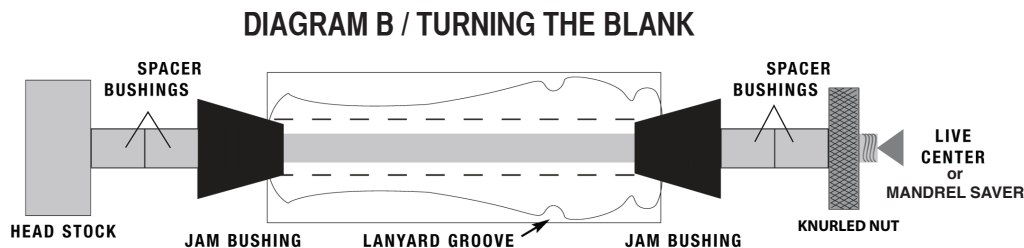


DIAGRAM A / PART LAYOUT



Turning the Blank

- Mount spacer bushing and a jam bushing, wide end in first. Insert the blank and the remaining jam bushing narrow end in. Follow with spacer bushings. (see Diagram B)
- Use either a mandrel saver or a knurled nut to lock into place.
- Turn the wood blank down to the profile of your choice.
- Cut a groove to attach the lanyard cord.
- Sand and finish. Use penetrating oil for wood, or One-Step™ plastic polish for acrylics.


Assembly

- Insert the reed assembly, (reed side in first) into the center hole in the blank. Push inside tube until tight.
- Attach the lanyard cord into the groove.

Tips & Techniques

- Emulate the chatter of a tree squirrel to move them towards your location and attract their predators.
- This call is perfect for calling bobcat, lynx, and other predatory animals that hunt squirrels and birds.
- Simply puff small breaths of air and flick your tongue at the same time.

DIAGRAM C / BUSHINGS

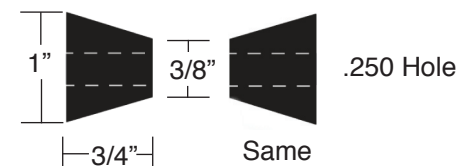

PSI Woodworking
PRODUCTS