

# Elk Call Kit

## Kit Features:

- Rigid ABS Plastic construction
- Designed by Game Call Professionals
- Factory tuned sound board
- Optional lanyard cord available

## Required Accessories:


- Blank required: 1-1/2" x 1-1/2" x 2-1/2" to 4" L
- 7mm Pen Mandrel
- Wooden Jam Bushing set: #PKGCALL2BU
- Drill Bits: #PKSB58 – 5/8" #FB78 – 7/8"



## Preparing the Blank:

- Cut your blank to the desired length of this call. Mark the center of the square ends. Drill a 7/8" hole – 1-1/4" deep first then continue with a 5/8" bit centered through the blank.

DIAGRAM B / TURNING THE BLANK

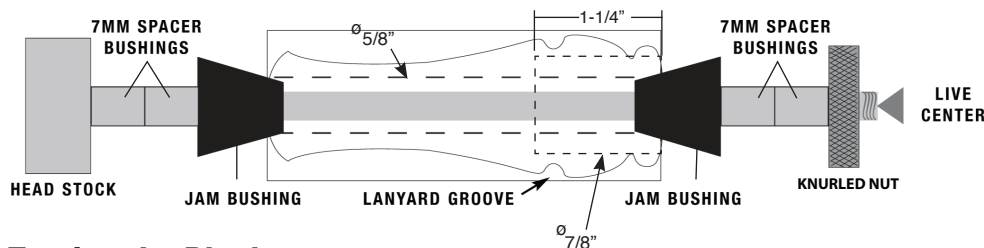

## Turning the Blank

- Mount spacer bushing and a jam bushing, wide end in first. Insert the blank and the remaining jam bushing narrow end in. Follow with spacer bushings. (see Diagram B)
- Use either a mandrel saver or a knurled nut to lock into place.
- Turn the blank down to the profile of your choice.
- Cut a groove to attach the lanyard cord.
- Sand and finish. Use penetrating oil for wood, or One-Step™ plastic polish for acrylics.

## Assembly (see dia. C)

- Affix the reed over the reed housing-mounting pins. Lay the cover over to match.
- Insert this assembly, smaller diameter in first into the larger opening at the blanks.
- Attach A hanging lanyard cord. (Optional)

**NOTE:** That the larger (7/8") diameter of the reed housing will seat in the blanks 7/8" hole

DIAGRAM A / PARTS LAYOUT

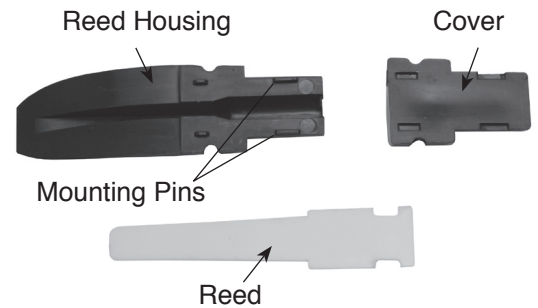


DIAGRAM C  
position the reed



## Tips & Techniques

- Made to persuade bulls to start calling. This call delivers excellent sound
- Easily manipulate the "sweet spot" of the tone board to crank out quality bugles, grunts, squeals, cow and calf sounds.

DIAGRAM D / BUSHINGS

